

# Standard Model

The flexible banding machine

- › *Fast and accurate*
- › *Easy to operate*
- › *Robust and reliable*
- › *Sustainability benefits*

Multi-Width option -  
interchangeable  
band widths



The Bandall Standard Model is the tried and trusted basis for our wide ranging, high tech fleet of industrial banding equipment. A staple in the world of bundling and packaging that continues to innovate and support you in adapting to your customers' needs.

Designed for reliability and longevity, and to use minimum packaging, it is altogether a sustainable choice with a fast ROI.

## Bandall offers:

- › The **optional Multi-Width facility**, multiple band widths with each banding unit
- › **Consistently fast and reliable banding** made possible by the Bandall advanced vacuum transport technique
- › **Significant reductions in packaging** using the finest paper and film banding available
- › Guaranteed **product-friendly banding** creates stable bundles for transportation
- › The **hygienic Ultra Clean Seal (UCS) system** features in all Bandall equipment
- › **More and more savings** - low energy consumption and minimal maintenance - simply the banding machine with the lowest cost of ownership

## Multi-functional banding

Bandall equipment processes a vast range of banding papers and films, from super fine to robust, as needed. Standard band widths are 28 mm, 40 mm, 48 mm, 60 mm, 75 mm, 100 mm and 125 mm. Alternative band widths are available upon request and multiple band widths per machine are optional.

The Bandall range includes options such as Stainless Steel, positioning of pre-printed banding, fully automatic solutions for seamless inline integration with, for example, counting and stacking, multiple and cross banding, Print & Band for variable data, and much more.




# Solid performance

*Bandall banding systems are built for simple and efficient operation. Recent developments include advances within the machine to further improve accessibility and reduce the number of consumable parts to almost zero. Confidently, the lowest cost of ownership.*



**NEW OPTION:**  
Easy click system  
to change the  
band width

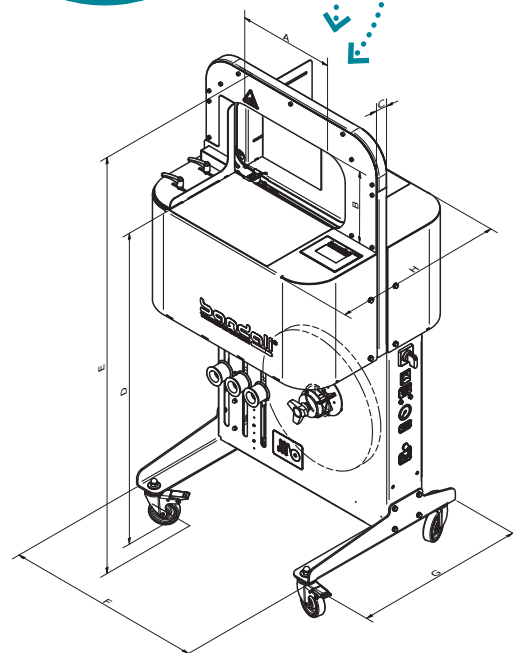


## The Standard Model offers:

- › **Easy implementation** into your production facility, simply wheel into place
- › **Automatic operation** via a sensor, a touchscreen or foot switch
- › Access to settings via a **touchscreen with pictograms**, no language skills required
- › **Operation from both sides**
- › **Options** such as positioning, variable data printing, bundle press, Multi-Width banding
- › Process **standard band widths**: 28 mm, 40 mm, 48 mm, 60 mm, 75 mm, 100 mm and 125 mm. **Alternative band widths** upon request
- › **Adjustable product guides**
- › **Castors with brakes**
- › Easy and accurate **selection of band tension**
- › A wide selection of **fully automatic models and bespoke solutions**
- › Expert sales and technical **support**

MACHINE TYPE	A Max. prod. width	B Max. prod. height	C Channel width	D Work height	E Total height	F Width	G Base depth	H* Depth	Weight KG	Bundles/ min.
BA24/15-30	240	150	30	956	1214	600	494	496	70	36
BA32/20-30	320	200	30	956	1264	600	494	496	70	34
BA40/25-30	400	250	30	956	1314	760	494	496	85	32
BA48/30-30	480	300	30	956	1364	760	494	496	85	30

\* With a channel width of 50 mm, H is 520 mm. With a channel width of 77 mm, H is 547 mm.  
With a channel width of 102 mm, H is 572 mm. With a channel width of 127mm, H is 597 mm.  
127 mm is available only for the BA24 and BA32.  
Sizes in mm.

<b>Voltage</b>	230V/115V
<b>Frequency</b>	50 HZ/60HZ
<b>Required air pressure</b>	Min 6 bar, max 10 bar.
<b>Air consumption</b>	max. 60 L/min.
<b>Power</b>	500 watt

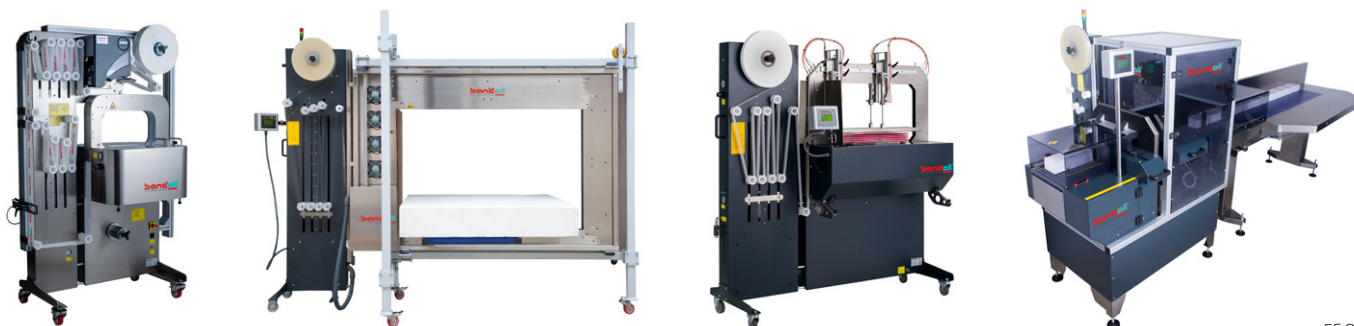

EE/OE

**bandall**<sup>®</sup>  
THE STANDARD IN BANDING

BANDALL B.V. Damzicht 45, 3454 PS De Meern - Utrecht, The Netherlands  
T +31 (0)348 431520 F +31 (0)348 431480 E info@bandall.com I bandall.com

# Branding by Banding Model

## Design meets sustainability

- › High performance labelling with state-of-the-art positioning technology
- › Printed banding displays your product to its best for optimum shelf appeal
- › Brand, label, seal and tell your story as you like it
- › Reduce packaging volumes with sustainable banding

All Bandall equipment is of pure Dutch design, engineering and manufacture. Our Branding by Banding Model is durable, industrial banding equipment, from flexible stand-alone mobile units to fully automatic and in-line bespoke solutions. Often replacing excessive or complex packaging, banding is a sustainable option. Materials include FSC certified paper and 100% recyclable film.



Brand, label, seal and tell your story as you like it

### Branding by Banding Model:

- › All your **branding, product details and storytelling** on a single neat band
- › Rapid and reliable processing with **high-tech band transport technology**
- › One machine processes a **wide selection of materials**
- › **Consistent accurate positioning** on each and every product
- › Unique **UCS (Ultra Clean Seal) system** guarantees a hygienic and safe seal
- › Low energy, maintenance and operational costs - Bandall continues to guarantee **the lowest cost of ownership**

Multiple band widths with one machine - easy accessibility for roll change

Print unlimited variable data during application






# 100% precision banding

The Branding by Banding Model performs with outstanding precision and reliability. The high-tech band transport system guarantees rapid band transport around the arch and consistently accurate application.



**NEW OPTION:**  
Easy click system  
to change the  
band width

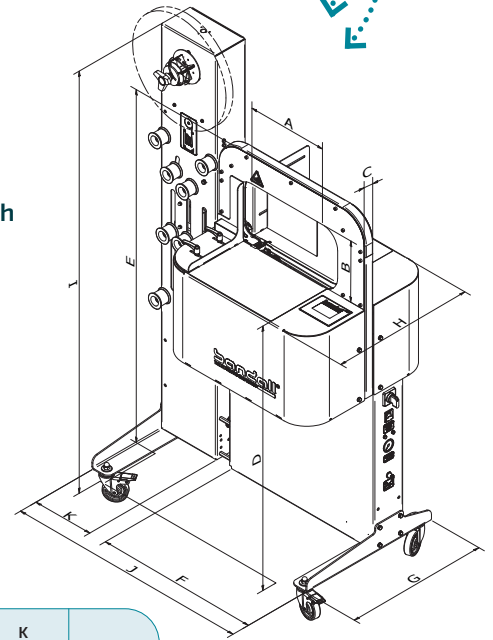

Bandall systems are designed for user-friendly and efficient operation. The Branding by Banding Model includes:

- › A **touch screen control** panel with symbols – language free
- › Activation of the banding cycle via a **product sensor, a button or a foot switch**
- › **Operation from both sides** of the machine
- › A choice of **standard band widths**: 28, 40, 48, 60, 75, 100 and 125 mm. Alternative band widths upon request
- › **Adjustable product guides**
- › **Precision tension adjustment**
- › **Mobile machine**, on castors with brakes
- › **Options** such as multiple band widths, thermal transfer printer, bundle press
- › A wide selection of **fully automatic models** and bespoke solutions

MACHINE TYPE	A Max. prod. width	B Max. prod. height	C Channel width	D Work height	E Height	F Width	G Base depth	H* Depth	I Total height	J** Total width	K Width of external reetholder	Cycles/ min. ***
BA24/15-30	240	150	30	955	1220	600	500	500	1505	840	220	36
BA32/20-30	320	200	30	955	1270	600	500	500	1505	840	220	34
BA40/25-30	400	250	30	955	1320	760	500	500	1505	1075	280	32
BA48/30-30	480	300	30	955	1370	760	500	500	1505	1075	280	30

\* With a channel width of 50 mm, H is 520 mm. With a channel width of 77 mm, H is 547 mm. With a channel width of 102 mm, H is 572 mm. With a channel width of 127 mm, H is 597 mm.  
\*\* With a positioning system fitted, J is 130 mm wider.  
\*\*\* With positioned bands the capacity is about 18 to 20 bands per minute, dependent upon the product to be banded.  
Sizes in mm.

<b>Voltage</b>	230V/115V
<b>Frequency</b>	50 HZ/60HZ
<b>Required air pressure</b>	Min 6 bar, max 10 bar
<b>Air consumption</b>	max. 60 L./min.
<b>Power</b>	500 watts



**bandall**<sup>®</sup>  
THE STANDARD IN BANDING

BANDALL B.V. Damzigt 45, 3454 PS De Meern - Utrecht, The Netherlands  
T +31 (0)348 431520 F +31 (0)348 431480 E info@bandall.com I bandall.com



EE/OE