

PRODUCT SELECTION GUIDE



Decker
Tape Products, Inc.

*"we're about ideals
and innovation,
solutions and service"*

MISSION STATEMENT

Decker Tape exists to supply superior pressure sensitive products to our customer's individual application needs and challenges. Our family based values of honesty and integrity are evident in our loyal and forthright relationships with our customers, employees, suppliers, and community.

ABOUT DECKER TAPE

Incorporated in 1969 and headquartered in New Jersey, Decker Tape Products is a third-generation printer, converter and specialty manufacturer featuring a full line of pressure-sensitive tapes. A national supplier with over a dozen representative sales offices across the United States, Decker serves a unique niche in the tape supply/distribution channel.

Experts at custom slitting, spool winding, printing, laminating and sheeting, Decker will fill an order of almost any size and cut to exactly the width and length specified. Decker has earned a reputation for quality craftsmanship, competitive pricing and a quick turn-around on orders as small as one case or as large as truckloads.

We're about ideals and innovation, solutions and service. Decker sells only through distributors, and this relationship is important to us. We attribute our growth to our long-held philosophy: "Success is putting the customer first, then making it last."



PRODUCT LINES

Providing superior quality products, Decker Tape prides itself with getting it right the first time.

Noted for our **PRINTED TAPE PRODUCTS**... Decker prints on Polypropylene, PVC, Polyethylene, Paper, Filament and Strapping Tape.

Our **GENERAL TAPE LINE** includes every pressure-sensitive tape under the sun... Film, Paper, Double-Coated, Duct, Filament, Strapping, Foam, Teflon and more.

Decker also manufactures a unique line of **SPECIALTY PRODUCTS**, including our highly successful Tape Handles and Padded Tape Products.

And last, but far from least, Decker prints our own line of **STOCK LABELS**. Our easy-to-use label catalog is unsurpassed in the industry.


Our goal is to make each and every ordering experience enjoyable... one worth repeating. You'll find no red tape here. Unless, of course, you order it.

TABLE OF CONTENTS

GENERAL LINE	PAGE	SPECIALTY TAPE	PAGE	PRINTED TAPE	PAGE
Film Tape.....	3	Repair Tape Pads.....	19	Stock Printed Tape.....	23
Paper Tape.....	7	Double Coated Tape Pads.....	19	Custom Printed Tape.....	24
Spooled.....	9	Return Tape.....	19		
Filament & Strapping Tape.....	9	Tape Handles.....	20		
Double Coated Tape.....	11	Hook & Loop.....	21	FOR YOUR CONVENIENCE	
Double Coated Foam Tape.....	13	Pouch Tape.....	21	Metric Equivalents.....	2
Duct Tape.....	13	Printed Gummed Tape.....	21	Packaging Chart.....	2
Electrical Tape.....	15	Tape Dispensers.....	21	Color Chart.....	25
Foil Tape.....	15	ESD Aisle Marking.....	22		
Teflon, UHMW, Kapton.....	17	Static Free Tape.....	22		
Box Sealing.....	17	Security Tape w/serrated edge.....	22		
		Tamper Evident Tape.....	22		

See back cover for complete product index.

METRIC EQUIVALENTS

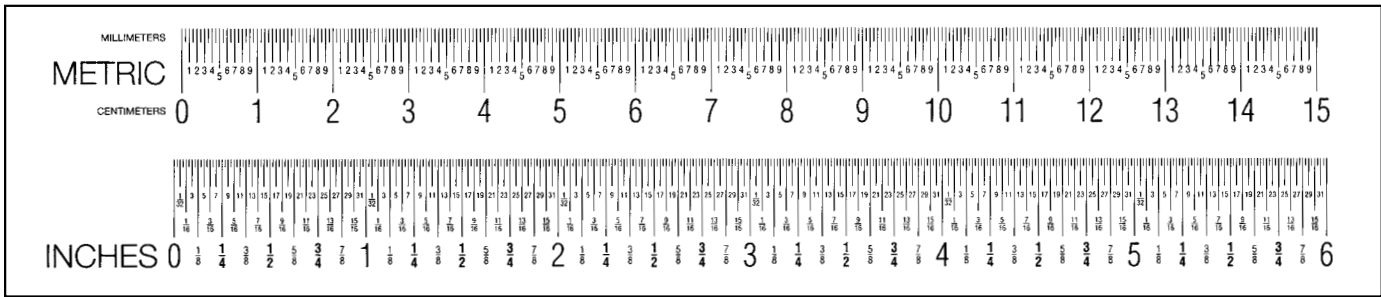

TAPE IS SLIT TO METRIC SIZES	<u>metric width</u>		<u>metric length</u>	
	1/4" = 6mm	1-1/2" = 36mm	18 Yd = 16.5m	180 Yd = 165m
	3/8" = 9mm	2" = 48mm	36 Yd = 33m	216 Yd = 198m
	1/2" = 12mm	3" = 72mm	55 Yd = 50m	360 Yd = 330m
	5/8" = 15mm	4" = 96mm	60 Yd = 55m	500 Yd = 457m
	3/4" = 18mm	5" = 120mm	72 Yd = 66m	1000 Yd = 914m
	1" = 24mm	6" = 144mm	110 Yd = 100m	1500 Yd = 1371m

PACKAGING CHART

ROLLS PER CASE	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	1-3/4"	2"	2-1/2"	3"	4"	5"	6"
A	144	96	72	60	48	40	36	28	24	24	24	16	16	12	8	8
B			144		96											
C		96														
D			72		48											
E	288	192	144	120	96	78	72	54	48	36	36	24	24	18	12	12
F	192	128	96	80	64	52	48	36	32	24	24	16	16	12	8	8
G	48	32	24		16		12		8		6		4	3	2	2
H	36	24	18		12		9									
I	36	27	18	14	12	9	9	9	8	6	6	4	4	3	2	2
J							72		48		36		24	18	12	12
K							12		8		6		4	3	2	2
L									48	36	36	24	24	18	12	12
M	216	144	108		100		96									
N							6				3		2			
P			48		32		24									
Q			10		7		5				2					
R					100											
S	144	96	72	60	48	36	36	28	24	18	18		12			6
T	Available in broken case quantities.															
U	Call Decker Tape for packaging 800-227-5252															

FILM TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
40	Vinyl Electroplating Tape	36	R	6.5	30	25	200	32° - 176°	A	3M 470 Permacel P35
42A	5 Mil Polyethylene Tape - Colors	36	A	5.5	56	10	550	-40° - 190°	A	3M 483 Tyco 832
43	9 Mil Polyethylene Tape - Colors	36	R	9	70	22	100	32° - 160°	A	3M 480 Tyco 827
43NR	Polyethylene Tape Natural Rubber Adhesive	36	R	8	60	23	90	180°	A	3M 480 Tyco 827
44	All Purpose Vinyl - Colors	36	R	6	22	16	150	20° - 140°	A	3M 471 Permacel P33 Shurtape VP410 Tesa 60760
75	Polyester Film Silicone Adhesive	72	S	2	30	25	90	32° - 350°	A	3M 8402 Permacel P904 Tyco 781
77	Powder Coating Tape	72	S	3.5	25	50	100	32° - 435°	A	Ideal 9249
87	Hazard Warning Tape - Striped	18	R	7	22	18	150	-20° - 176°	A	Shurtape VP415
88	Heavy Duty Laminated Hazard Warning Tape - Striped	18	R	9	17	20	120	20° - 176°	A	3M 5700
90RF	Reflective Tape	50	A	6.9	70	11	24	-40° - 180°	A	3M 3200 Avery T-1500
98 98C	UPVC Tape UPVC Tape - Colors	72	R	2.2 2.3	18 18	22 22	70 75	-4° - 158° -4° - 158°	A	3M 690 Tesa 4104
99	UPVC Fluorescent Orange	72	R	2.3	18	22	80	-4° - 158°	A	3M 690
100	Polypropylene Tape - Colors	72	A	2	18	15	120	32° - 150°	A	IPG 13C 3M 373
105	Cellophane Tape	72 36	R	1.8	59	22	22	32° - 140°	S B	3M 5912 Tesa 4101-PV2 Shurtape CT109 IPG MC1
106 107	Static Free Tape	72 36	R	2	66	25	25	32° - 150°	S B	
108	Transparent Film Repositionable Adhesive	72	R	2	10	51	130	40° - 120°	A	3M 811
110	Invisible Mending Tape Matte Acetate	72 36	A	2.3	25	17	35	32° - 160°	A B	3M 810
111 111M	Computer Form Splicing Tape	72	A	2 2.3	18 25	15 17	120 35	32° - 160°	U	3M 810

NO.	DETAILED DESCRIPTION	APPLICATION
40	Highly conformable abrasion resistant vinyl, designed specifically for electroplating.	<ul style="list-style-type: none"> Masking during electroplating Circuit board protection during gold plating
42A	Highly conformable polyethylene tape available in 7 different colors (yellow, blue, green, red, black, white & clear). UV resistant. Can be custom printed.	<ul style="list-style-type: none"> Seal ink cans, plastic bins and end caps Greenhouse repair tape Silk screen masking Splice polyethylene films Silicone chip holding Protective tape on glass and plexiglass with a clean removal
43	Polyethylene multi-purpose tape coated with a rubber adhesive. Available in yellow, blue, red, black, white & clear. Can be custom printed.	<ul style="list-style-type: none"> Silage patch tape Stucco masking/Asbestos abatement Band plastic boxes Hold boat covers Protect threshold on doors & window sills Patch pool liners Secure wrestling mats Damage repair at construction sites Outdoor preservation Splice/patch polyethylene
43NR	Polyethylene with a natural rubber adhesive. Resists chemical deterioration. Available in clear only.	<ul style="list-style-type: none"> UV and weather resistant for stucco masking, splicing and greenhouse repair Seal bags of fiberglass Outdoor label protection
44	All purpose vinyl with excellent resistance to sun, water, oil, chemicals, acid and alkalies. Meets OSHA color coding requirements. Available in 11 different colors (blue, brown, black, green, grey, orange, purple, red, clear, white, yellow).	<ul style="list-style-type: none"> Floor, lane and aisle marking Seal glass jars, ink cans, chemical and paint containers Splice PE shrink films for boating & air conditioning units Insulate air ducts & underground pipes Color coding pipes
75	1 mil polyester coated with a silicone adhesive. Excellent resistance to chemicals and fumes. Available in pink, blue and yellow.	<ul style="list-style-type: none"> Mask electronic parts and circuit boards during plating or stripping of gold finger contact Splicing silicone papers & films
77	2 mil green polyester film with silicone adhesive offering clean and easy removal.	<ul style="list-style-type: none"> Masking parts for powder coating Mask ink cartridges on fax and copy machines for "leak free" seals
87	Safety stripe all purpose vinyl for aisle marking. Available in yellow/black, white/black, red/white.	<ul style="list-style-type: none"> Aisle marking for low to moderate traffic areas Mark off exits, hazardous areas, first aid points, fire equipment, stairs, electrical panels
88	Heavy-duty laminated vinyl for extra protection. Meets OSHA standards. Resists oil, grease, solvents and moisture. Available in yellow/black, white/black, red/white.	<ul style="list-style-type: none"> Aisle marking in HEAVY traffic areas (will stand up to abuse of fork lifts, heavy machinery, trucks, etc) Safety warning tape on machines
90RF	Retro-reflective sheeting offering 7 year performance life. Conforms to all requirements of ASTM-D-4956 Type I sheeting. Resistant to extreme weather conditions. Available in 7 colors (yellow, orange, red, blue, green, black, white).	<ul style="list-style-type: none"> Barricades Fire Hydrant reflectors High quality signage Construction zones This tape is detectable by photoelectric sensor Does not meet DOT specs
98 98C	UPVC tape. Heat shrinkable, solvent & moisture resistant. Printable. Available in yellow, dk green, lt green, orange, red, black, lt blue, med blue, dk blue, tan, white & clear.	<ul style="list-style-type: none"> Bag sealing (bakery, food, paint brush) Cap closure Bundling plastic pipes Color coding Film/Label splicing tape Candy/Cookie tin sealing
99	Similar to 98, but in vibrant fluorescent orange. Even more vibrant when printed with security warning.	<ul style="list-style-type: none"> Closing bakery poly bags Security and identification Cap closure Bundling plastic pipes Bag sealing paint brushes Film/Label splicing tape
100	2 mil polypropylene with acrylic adhesive. Available in yellow, orange, red, blue, green, black, purple, tan, white & clear. Can be custom printed.	<ul style="list-style-type: none"> Color coding Product Identification
105	Transparent cellophane film coated with a rubber adhesive. For use with desktop dispenser. Available in 36 yard on 1" core or 72 yard on 3" core.	<ul style="list-style-type: none"> Desktop mending tape Gift wrapping Bakery (donut and cake) boxes Edge reinforcement Candy bag sealing
106 107	Transparent cellophane film with a high tack rubber adhesive, available printed with stock "Antistatic" warning & ESD symbol, or custom printed. Product 106 is on a 3" plastic core; 107 is on a 3" paper core. Meets AA 113C Type I.	<ul style="list-style-type: none"> Static free mending and packaging tape for clean room and computer/electronics industry
108	Highly transparent film coated with special low tack removable & repositionable adhesive.	<ul style="list-style-type: none"> Tabbing gift wrap and wallpaper Repair damaged folders Photo-copying Temporarily attach cardboard tags to appliances Ideal for holding items together in a gift basket Clean removal multi-pack tape
110	A matte acetate film with a non-yellowing acrylic adhesive. Available in 36 yard on 1" core or 72 yard on 3" core.	<ul style="list-style-type: none"> Mend and repair torn documents Finger print lift tape Laminating tape
111 111M	A 2 mil transparent polypropylene film with continuous perforation down the center of the roll. 111M is matte acetate.	<ul style="list-style-type: none"> Splicing all continuous forms or perforated labels

FILM TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
112	Edge Reinforcement	72	A	2	18	15	120	32° - 150°	A	3M 600
113TR	1.7 Mil Poly Tape - Easy Tear	72	R	1.7	44	22	165	45° - 120°	A	Permaccel P917
115TE 115TA	1.8 Mil Poly Tape - Transparent	72 36	A	1.8	13	15	120	32° - 140°	A B	3M 5910 IPG 217 Tyco 150
116	Red Lithographers Tape	72	R	2.4	25	35	60	32° - 150°	A	3M 616 Tesa 4156
120	Super Clear Transparent Tape	72	A	2	23	18	140	32° - 140°	A	3M 356 Permaccel PJLAR Shurtape PP807
125	UPVC Bag Sealing Tape	180	R	2.3	18	22	80	-4° - 158°	C	3M 690 Shurtape 808 Tesa 4104
130	Polyester Tape	72	R	1.6	18	34	120	32° - 176°	A	3M 850 Permaccel P925
136	Metalized Polyester Tape Silver/Gold	72	A	2	30	18	60	0° - 300°	T	3M 850
140SL	Silk Screen Tape	50	R	3	80	50	160	-10° - 200°	T	
141WS	Wafer Seals		A	3	45			-65° - 200°	U	
144	Aisle Marking - Heavy Duty	18	A	6	40			-40° - 176°	A	
180	Label Protection Tape - Ultra Cear	72	A	1.8	13	15	120	35° - 140°	L	3M 3765 Permaccel PJLAR Shurtape PP807
185	Label Protection Tape - Clear	72	R	1.7	44	22	165	45° - 120°	L	3M 3565 Permaccel P911
187	Label Protection Tape - Matte	72	A	2	22	18	120	32° - 176°	L	3M 810 Tesa 53208 Shurtape PP919
278	Protective Film - 2 Mil	200	A	2	3 - 5	7	225		F	
279	Protective Film - 3 Mil	200	A	3	2 - 4	11	225		F	
1980C	Thermoformable Red UPVC Tape	36	R	3.2	550 g	60 K/g	80	312°	A	
ST31	Non-Skid Safety Tape	60FT	A	4.5	90	135	35	40° - 150°	G	3M Safety Walk

NO.	DETAILED DESCRIPTION	APPLICATION
112	2 mil transparent BOPP, available in 72 yard rolls for hand application or 2000 yard for automatic application.	<ul style="list-style-type: none"> • Edge reinforcement and tabbing • Photo albums • Prescription label protection • Hold lids on plasticware • Laminating
113TR	Transparent film with a rubber adhesive and easy-tear feature. Excellent resistance to weathering, chemicals and oils.	<ul style="list-style-type: none"> • Wrap fruit baskets and flower bouquets • Gift wrap • Mending tape for office use
115TE 115TA	Extra clear transparent poly film with acrylic adhesive that will not yellow and is resistant to water, chemical, aging and moisture. 115TA has scored edges for an easy tear and is available in 36 yard on 1" core or 72 yard on 3" core. 115TE has "tough edges" and is 72 yards.	<ul style="list-style-type: none"> • Prescription label protection • Overlamine for identification cards • Tabbing • Gift wrap • Bundling • Desktop mending tape
116	Ruby Red UPVC film with specially formulated rubber adhesive for work with photography negatives.	<ul style="list-style-type: none"> • Masking and stripping film negatives in printing and newspaper industry
120	Super clear-to-the-core non-yellowing film. UV resistant.	<ul style="list-style-type: none"> • Prescription label protection • Candy and small box closures • Protective covering & industrial laminating
125	UPVC film tape for bag sealing. Can be custom printed. Available in 11 colors (yellow, dk green, lt green, orange, red, black, lt blue, med blue, dk blue, tan, white & clear). Approved for indirect food contact.	<ul style="list-style-type: none"> • Bag sealing fruits/vegetable/candy/cookies/small food items/paper cup sleeves/helium balloons • Heavily used in produce/agriculture markets • Bundling industrial parts
130	Transparent polyester film with a natural rubber resin adhesive. Approved for indirect food contact.	<ul style="list-style-type: none"> • Temporarily holding credit cards to mailers • Tape hinge • Edge splicing & holding • Bandoliering hardware • Bag closure
136	Polyester film coated with a solvent acrylic adhesive available in shiny silver or gold. UV light resistant.	<ul style="list-style-type: none"> • Electronic detection in identifying roll splices or end of roll • Decorative trim for photo albums, appliances, boats, etc. • Splicing in high temps, including infrared radiation • Used when high temperature labeling, splicing and holding are required
140SL	Clear 3 mil film with split-back liner.	<ul style="list-style-type: none"> • Silk screen for masking the edges of screen after emulsion or stencil has been applied
141WS	Die cut circles of water-clear polystyrene transparent film on a 60 lb. silicone release liner. Available with or without perforation. 2000/roll.	<ul style="list-style-type: none"> • Used to seal pharmaceutical pouches, envelopes, small boxes, advertising mailers and invitations
144	Vinyl with acrylic adhesive and laminated for extra protection. Available in yellow & white only. Can be custom printed.	<ul style="list-style-type: none"> • Aisle marking for heavy traffic areas
180	Ultra clear polypropylene with an acrylic adhesive that will not yellow or discolor.	<ul style="list-style-type: none"> • Label protection and laminating
185	Clear polypropylene coated with a rubber adhesive for easy release and quick stick to all surfaces.	<ul style="list-style-type: none"> • Label protection and laminating • Synthetic adhesive will not cause copy to fade on NCR paper
187	Matte polypropylene label protection tape with a special acrylic adhesive system.	<ul style="list-style-type: none"> • Non-glare surface allows for electronic scanning & bar coding • Can be written on • Prescription and label protection
278	Transparent PE film with low tack adhesive for clean removal.	<ul style="list-style-type: none"> • Surface protection of finished metals, aluminum, stainless steel, synthetic marble, vinyl & plastic laminates • Protect printing plates and fluorescent light fixtures during shipment
279	Transparent PE film with low tack adhesive for clean removal.	<ul style="list-style-type: none"> • Protect polished metals, appliances, acrylic sheeting • Protect light switches and kickplates in transit
1980C	Red thermoformable splicing tape.	<ul style="list-style-type: none"> • Used on web-fed thermoforming equipment to splice roll to roll film
ST31	High traction black safety tape. When applied to surface, this non-skid tape creates secure foot traction.	<ul style="list-style-type: none"> • Engineered to stabilize and eliminate dangerous & slippery areas indoor/outdoor, on recreational equipment, stairs, food service

PAPER TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
220	Crepe Masking - General Purpose	60	R	5.5	48	20	8	50° - 150°	A	3M 2307 Permacelel P790 IPG PG505, Tesa 53123 Shurtape CP83
220N	Crepe Masking - Premium	60	R	6	43	23	8	0° - 200°	A	3M 234 Permacelel P703 Shurtape CP99 IPG 519
221	Crepe Masking Performance Grade	60	R	7.3	28	26	10	32° - 325°	A	3M 213 IPG PG-21 Shurtape CF740
222	Hi-Temp Masking Tape	60	R	7.4	24	20	8	-32° - 176°	A	IPG PG-5, 3M 232 Permacelel P786 Shurtape Colonial Tesa 53134
223	Ultra Hi-Temp Masking Tape	60	R	7.5	35	22	8	-32° - 340°	A	3M 214 Shurtape CP98
1222	Hi-Temp Masking Discs		R	7.5	35	22	8	-32° - 340°	U	
224	Colored Crepe Masking	60	R	5.2	46	23	7	40° - 180°	A	IPG 561 Shurtape CP64
227	Blue Painters Masking	60	A	4.8	22	21	7	40° - 140°	A	3M 2090 Shurtape CP27 IPG PT-14
229	Kraft Flatback - General Purpose	60	R	7	60	36	7	40° - 180°	A	IPG 539 3M 2516 Tesa 4313
230	Kraft Flatback - Carton Sealing	60	R	7	50	39	7	32° - 180°	A	IPG 534 Tesa 4312
240	Natural Flatback - High Strength	60	R	8.4	93	51	4	32° - 180°	A	IPG 538 3M 266 Shurtape FP202
250	Flatback - Colors	60	R	7.5	77	51	4	40° - 180°	A	IPG 546
251P	Rope Flatback - Printable Colors	60	R	6.5	42	30	3	32° - 150°	A	IPG PF-2 3M 256 Shurtape FP227
254	Rope Flatback Fluorescent Orange	60	R	6.5	42	30	3	32° - 150°	A	IPG PF-5 Shurtape FP227
260	Drafting Tape	60	R	7	15	18	7	32° - 200°	A	3M 230 Tycos 660 IPG PH7
275	Protective Paper Tape - Standard	100	R	4.3	10	20	3		F	Main Tape GXP525 IPG 582 ABI 6560
276	Protective Paper Tape - Premium	100	R	4.3	16	20	3		F	IPG SB21 Main Tape GXP575 ABI 6592

NO.	DETAILED DESCRIPTION	APPLICATION
220	All-purpose production grade masking with high tack rubber adhesive. Excellent adhesion and quick stick.	<ul style="list-style-type: none"> • General purpose holding, masking, bundling & splicing • Deli wrapping • Roll startup and paper splicing
220N	Premium grade masking tape that removes cleanly. Used for paint masking applications and is resistant to temperatures up to 200°F. Meets PPP-T-42C Type I.	<ul style="list-style-type: none"> • Paint masking • Splicing non-wovens, leather goods, wallpaper, plastics • Sealing cans & drums • Pleaters tape • Freezer tape
221	High performance masking with clean removal after exposure to temps up to 325° for 30 minutes. Perfect for all ultra high temperature applications.	<ul style="list-style-type: none"> • Automotive painting • Marine painting • Metal part masking & finishing • Available in die cut pieces
222	Excellent quick-stick & good resistance to water, solvents & oil. No residue, non-staining up to 176°. Meets PPP-T-42C Type I.	<ul style="list-style-type: none"> • Performance grade masking • Masking metal & wood • Automotive painting
223	Ideally suited for demanding masking applications in the transportation, marine and metal fabrication industries. Meets PPP-T-42C Type I.	<ul style="list-style-type: none"> • Automotive paint masking • Used on aluminum anodized surfaces • Masking for painting where extreme (340°) or multiple heat stages are required
1222	High temperature masking discs on a roll, available in diameters from 1/8" to 12". Ideally suited for demanding masking applications in the transportation, marine and metal fabrication industries. Meets PPP-T-42C Type I.	<ul style="list-style-type: none"> • Mask specific small areas (metal, plastic, & wood) before painting or finishing
224	Premium crepe masking available in 6 colors: green, blue, black, red, white and yellow.	<ul style="list-style-type: none"> • Color coding / Inventory control identification • Bundling & splicing • Bag sealing
227	Blue painters masking that removes cleanly from painted walls, trim, woodwork, glass and metal for up to 14 days without damage, even when exposed to direct or indirect sunlight.	<ul style="list-style-type: none"> • Temporary masking by painters • Temporary mending in outdoor applications (windshields)
229	Excellent resistance to aging, solvents and water. Can be used with hand dispenser or automatic case sealer. Meets PPP-T-42C Type II.	<ul style="list-style-type: none"> • Box sealing (preferred by moving companies) • Reinforce paper bags & boxes • Patch & cover used cartons • Picture framing • Floor industry for splicing by installers
230	Good flexibility and tensile strength; high tack and weather resistant. UPS & USPS approved. Meets PPP-T-42C Type II.	<ul style="list-style-type: none"> • Textile pleaters tape • Flying splice on chipboard • Carton sealing • Hand-tearable bundling • Splicing non-wovens • Bandoliering
240	Heavy-duty kraft flatback tape with an aggressive rubber adhesive. Meets Government spec ASTM D5486, Type V for motor freight, air express, railway express, airfreight and postal shipment requirements. Suitable for temperature extremes. Meets PPP-T-76C Type V.	<ul style="list-style-type: none"> • Gov't packaging & carton sealing • Use on recycled corrugated • Beaming tape (240DL) • Linerboard splicing • Light sandblasting • Heavy-duty splicing
250	A general purpose, smooth backed, flatback tape available in 5 colors: white, yellow, red, green and black.	<ul style="list-style-type: none"> • Defect flagging • Color coding • Identification • Decorating • Marking bins and shelves
251P	High quality printable paper tape has a smooth backing for a clear sharp message. Non-staining and good resistance to oils and abrasion, as well as clean removal. Available in 6 colors: blue, green, orange, red, white, yellow. Printable.	<ul style="list-style-type: none"> • "Artist Tape" • Deli depts. to label sandwiches & food • Coffee bag sealing • Light-weight packaging • Book binding • Bandoliering
254	High quality and highly visible rope flatback tape that can be printed. Fluorescent orange color allows for identification from a distance.	<ul style="list-style-type: none"> • Shelf marking • Temporary safety marking • Security tape • Defect flagging
260	A crepe masking tape that can be repositioned. Good flexibility and resistance to water, solvents and oil. Stain resistant. Meets UU-T-93D, AA-194C.	<ul style="list-style-type: none"> • Holding blueprints & tracings to drafting boards or other applications where low tack removable tape is required
275	A high-grade printable paper with a latex pressure sensitive adhesive for easy removal. Printable.	<ul style="list-style-type: none"> • Protect highly polished surfaces: metal, glass & plastics
276	High-Tack premium grade tape with a latex adhesive that offers clean removal without hazing or discoloring. Printable.	<ul style="list-style-type: none"> • Transfer of pre-cut vinyl letters produced on computerized sign making equipment • Masking rough & embossed vinyl & plastic

SPOOLED TAPE

	NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
NEW	3315	Bag Sealing Tape - Spooled	4923	R	2.1	20	25	70	0° - 150°	U	
NEW	3320	Veneer Tape - Spooled	3501	R	6	43	23	8	0° - 200°	U	3M 234 Permacel P703 Shurtape CP99
	3345	Tear-Strip Tape - Spooled	19,991	R	4.5	90	135	35	40° - 150°	U	Tesa 4236 3M 8624
NEW	3360	Handle Tape - Spooled	5470	R	2.8	50	85	30	-10° - 200°	U	

FILAMENT & STRAPPING TAPE

	300	Mono Filament - Economy Grade	60	R	3.9	69	110	4.5	32° - 150°	A	3M 8934, Shurtape GS490 Tesa 53317
	301	Mono Filament - Utility Grade	60	R	4.3	70	156	4	32° - 150°	A	Tesa 53318 Shurtape GS501
	303	Mono Filament - Light Duty	60	R	3.9	78	100	4	32° - 150°	A	Tesa 53317 IPG 285
	305	Mono Filament Production Grade	60	R	5.6	65	175	4	40° - 200°	A	IPG RG15, 3M 897 Tesa 53319 Shurtape CF740
	307	Polyester Filament Premium Grade	60	R	6	55	300	2	-32° - 130°	A	IPG RG16 Tesa 53311 Shurtape GS531
	308	Polyester Filament - Black	60	R	8	36	330	4.5	0° - 160°	A	3M 890 IPG 783
	310	Tensilized Polypropylene 145# Strapping Tape	60	A	4.7	35	145	30	30° - 180°	E	Tesa 4092 3M 863
	312	Tensilized Polypropylene 95# Strapping Tape	60	A	2.8	32	95	35	34° - 150°	E	3M 860 IPG 197 Tesa 4090
	313	Polyester Filament Superior Grade	60	R	6.6	57	281	5	40° - 150°	A	3M 893 Tesa 53311 Shurtape GS531 Permacel P167
	314	Polyester Filament Premium Grade	60 360	R	8.5	36	330	4.5	40° - 200°	A H	IPG RG16 3M 898 Tesa 53314
	315	Ivory Strapping Tape Appliance Grade	60	R	4.5	90	135	35	40° - 150°	E	3M 8898 Tesa 4298 IPG 815
	317	Low-Tack Strapping Tape	60	R	3	14	85	30	60° - 200°	E	3M 8884/8886
	320	Paper Backed Filament	60	R	8.6	75	200	5	0° - 145°	A	IPG 750
	322	Bi-Directional Filament	60	R	6.1	73	131	10	0° - 160°	A	IPG 745 3M 8959 Tesa 4579

NO.	DETAILED DESCRIPTION	APPLICATION
3315	Yellow UPVC film with a rubber adhesive used as a closure system for identification & security.	<ul style="list-style-type: none"> • Automatic bag closure of produce, fruit and breads
3320	Heavily saturated crepe paper. Highly conformable to adhere to irregular surfaces.	<ul style="list-style-type: none"> • Tape edges of veneer before trimming
3345	An ivory tensilized polypropylene film tape coated with a specially formulated adhesive for the corrugated industry. Available in various widths from 3mm wide.	<ul style="list-style-type: none"> • Widely used on corrugated boxes, envelopes and retail packaging for easy opening of closed packages by consumer
3360	MOPP film with a high shear adhesive for automatic applications.	<ul style="list-style-type: none"> • Bottled water • Pet supplies
300	Reinforced fiberglass filament with high tack & quick stick; moderate tensile strength.	<ul style="list-style-type: none"> • Non-critical bundling applications • Load stabilizing • Light weight palletizing
301	General purpose filament tape with an aggressive rubber adhesive. Medium tensile strength, high adhesion and excellent holding power. Can be custom printed.	<ul style="list-style-type: none"> • Catalog distribution center & mailing house bundling • Carton seal wardrobe boxes • Bundle metal pipes & rods, rolled metal, hoses, & PVC pipe • Reinforce and protect pallets from pilferage
303	An economical filament for lightweight bundling.	<ul style="list-style-type: none"> • Similar applications to Decker 300
305	Fiberglass reinforced filament with high adhesion and holding power. Excellent scuff & moisture resistance.	<ul style="list-style-type: none"> • Palletize heavy loads • Reinforcing, bundling and box sealing on demanding applications • Bundling metal & plastic • L & C clip applications
307	Premium polyester backed glass filament offers high tensile strength and excellent holding power. Meets PPP-T-97D Type II.	<ul style="list-style-type: none"> • Reinforce and palletize extra-heavy or over-loaded boxes • Unitize cartons • Box sealing of government documents • Strap rods, tubes and plywood without staining or scratching damage • Secure refrigerator doors, loose parts on stoves, etc. while in transit
308	High strength black polyester-backed filament for use where UV light or outdoor exposure is a factor. Moisture, abrasion & scuff resistant.	<ul style="list-style-type: none"> • Seal fiber & polyethylene canister tubes • All sealing applications with outdoor exposure
310	High tensile strength polypropylene strapping tape with an aggressive acrylic adhesive. UV and moisture resistant in both cold and heat. Available in black & clear.	<ul style="list-style-type: none"> • Palletizing, bundling, edge reinforcement
312	Strapping film with good resistance to staining, chemicals, water & acids. Colors: black, clear, orange & white. Can be custom printed.	<ul style="list-style-type: none"> • Bundling books, plastic pipes, etc. • Edge reinforcement • Palletizing in meat distribution industry
313	High performance polyester backed glass reinforced strapping tape with clean removal. Meets USDA requirements for indirect food contact. Can be custom printed. Meets A-A-167A.	<ul style="list-style-type: none"> • Use on L-Clip machine • Metal tabbing • Bundling of polished or painted metal surfaces • Palletizing • Container reinforcing
314	Premium polyester filament. Can be custom printed. Meets ASTM-D-5330 TYPE II.	<ul style="list-style-type: none"> • Maximum security on heavy duty closings • Used to strap extremely heavy and/or irregular cartons
315	An ivory colored polypropylene with a high performance rubber adhesive that is stain and moisture resistant. No odor. Can be custom printed.	<ul style="list-style-type: none"> • Used in appliance, furniture and computer industries to secure doors, shelves, windows, and loose parts where strong adhesion and no residue are critical • Metal tabbing
317	Low-tack MOPP, offering clean removal and no fiber tear. Available in clear & orange.	<ul style="list-style-type: none"> • Palletize and stabilize corrugated containers; removal will not damage graphics on carton • Used on appliance, glass, plastics, ceramics and wood where good adhesion and clean removal is required • Available in orange color for glass butting applications (easy removal from silicone seaming) • Exhibition floor marking
320	A natural color, smooth, paper-backed filament tape. Offers good tensile strength and weather resistance. Works well in low temps and bonds to most surfaces. Can be custom printed.	<ul style="list-style-type: none"> • Medium-duty bundling • Used as brick "grout-line" tape • Smooth surface can be written on • Meat packing industry • Exhibition floor marking
322	Bi-Directional filament tape that exhibits excellent cross-directional tensile strength needed for splicing and packaging. Resists splitting when used to seal an RSC carton. Excellent quick-stick, bonds to most surfaces, high conformability.	<ul style="list-style-type: none"> • Aggressive warehouse bundling • Wine industry • Heavy-duty splicing • Rolled carpet bundling • Tabbing / holding / reinforcing Gaylord boxes and lids

DOUBLE COATED TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
400	D/C Crepe Paper	36	R	6	80	16	5	30° - 150°	A	Permaceal P05 IPG 592 Shurtape DF63 Adchem 262C
401	D/C Flatback Paper	36	R	7	52	34	3	45° - 180°	A	3M 410B IPG591 Permaceal P02 Shurtape DF65
402	D/C Tissue - Rubber Adhesive	36	R	3.8	110	10	4	0° - 180°	A	Tesa 4903 3M 406 Adchem 262T
402R	D/C Tissue Repulpable	36	A	4.3	30	6		-10° - 300°	A	Permaceal P03 Tesa 51912
NEW 403R	D/C Tissue Repulpable - Blue	36	A	4.3	50	6	5	-10° - 300°	A	3M 9952, Nitto 5091 Tesa 51914 Permaceal P5033X
404	D/C Tissue - Acrylic Adhesive	60	A	5.1	54	5.5	3	32° - 302°	A	Tesa 4959 IPG-DCT10 3M 400, 404, 406
404XL	D/C Adhesive Transfer Tissue Extended Liner	216FT 1300FT	R	3.7	92	10	4	0° - 140°	P Q	Permaceal P5033X Tesa 4959
405	D/C Tissue - Red	60	A	6.3	71	5.5	3	-40° - 302°	A	3M 469
410	D/C Vinyl - White	36	R	7	120	12	40	0° - 180°	A	IPG 597
420	D/C Polyethylene	36	R	4	50	7	100	-5° - 140°	A	3M 419
425	D/C Polyester - Acrylic Adhesive	60	A	3.5	42	10	10	-4° - 212°	A	3M 415 Tyco 126 Permaceal P941 IPG 593
426	D/C Polypropylene - Red	60	R	5	130	28	55	0° - 120°	A	3M 9420 Tyco 726
430	D/C Polyester - Rubber Adhesive	36	R	3	90	10	50	0° - 180°	A	Adchem 262M 3M 415
431	D/C Polyester - Acrylic Adhesive	36	A	4.5	120	10	50	-10° - 180°	A	Adchem 4371M
440	D/C Cloth - Poly Liner	25	R	11	40	20	5	0° - 200°	A	Tyco 105 Shurtape DF642
441	D/C Cloth - Paper Liner	25	R	10	100	14	4	-10° - 158°	A	Permaceal P50
444	D/C UPVC - Linerless	72	A	3.2	30/22	22	40	0° - 160°	A	3M 665 Tesa 51903
448	D/C Polyester High Tack/Low Tack	72	R	3.4	20/80	10	50	0° - 150°	A	3M 9415
458	D/C Adhesive Transfer - 1.8 mil	120	A	1.8	32			10° - 250°	A	Tesa 4985
459XL	D/C Adhesive Transfer Extended Liner	3000FT 6000FT	R	1	105			0° - 140°	Q	3M 920XL

NO.	DETAILED DESCRIPTION	APPLICATION
400	A multi-purpose high quality crepe paper with excellent tack and tensile strength.	<ul style="list-style-type: none"> • Excellent for splicing textiles, paper & plastic • “Borco” drafting tape • Core startups and end tabbing of paper, film, foil & fabric • POP displays, posters, decorative wall art, signs, nameplates
401	Aggressive rubber adhesive conforms and bonds well to most surfaces. Solvent resistant and easy to remove liner.	<ul style="list-style-type: none"> • Golf club grip tape • Mount small fixtures, display items, moldings • Assemble chipboard displays • Mount printing plates to cylinders • Secure metal parts during machine operations • Join irregular surfaces (bond glass, metal, plastic, leather belts & garments) during fabrication
402	A lightweight tissue paper coated on both sides with high tack rubber adhesive. Quick stick.	<ul style="list-style-type: none"> • Permanent closure of poly bags • Lightweight splicing • Assembling chipboard • Laminate cork, cloth or felt, and general purpose bonding
402R	Double coated tissue with high tack water-soluble adhesive, making this a completely repulpable (biodegradeable) tape.	<ul style="list-style-type: none"> • Ideal for flying roll splice in paper and printing industry on fast running machines. Suitable for automatic core splicing
403R	Fully repulpable blue non-woven tissue coated on both sides with an extremely aggressive high performance acrylic adhesive.	<ul style="list-style-type: none"> • Suitable for high performance repulpable splicing applications in the manufacturing of paper, plastics and other continuous web processes. Especially suited for splicing of newsprint
404	A non-woven tissue coated with a solvent acrylic adhesive offering very high tack and excellent shear strength. Hand-tearable for easy use.	<ul style="list-style-type: none"> • Corrugators splicing tape • Automatic application on business forms • Flying splice in print industry • Mount plastic parts • Heavy-weight and difficult surface applications • Seam leather to leather, fabric to fabric • Attach cellular phone components • POP displays
404XL	Tissue reinforced adhesive transfer. High tack rubber adhesive with excellent performance. Available in 216 ft. hand rolls or 1300 ft. machine length.	<ul style="list-style-type: none"> • Business forms • Contract & fulfillment packaging • Long length & extended liner for automatic application
405	Bright red tissue coated with high tack, high temperature acrylic adhesive that “stands out” better than any in the industry. Hand-tearable for easy use.	<ul style="list-style-type: none"> • Corrugated splice detection • Printing press web splicing • Perfect tape for splicing coffee filters
410	White opaque vinyl tape with a rubber adhesive, providing quick stick and high tack. Hand-tearable.	<ul style="list-style-type: none"> • Textile and handbag industry • Temporary holding of plastic sheeting • All-purpose maintenance repair • Mirror manufacturing • Secure insulation for metal building construction • Carpet tape
420	Cost effective polyethylene film coated on both sides with a high tack rubber adhesive.	<ul style="list-style-type: none"> • Splice rolls of polyethylene (such as turkey netting) • Splicing films and woven materials • Core startup • Carpet tape
425	A 1/2 mil polyester film coated with a solvent acrylic adhesive offering excellent temperature performance and UV resistance.	<ul style="list-style-type: none"> • Hold plastic keyboard in place • Fabric seaming • Corrugators splicing tape • Automatic splicing machines • Graphic arts • Splice paper, films, foils • Apply plastic wrap to windows for winter protection • Laminate dissimilar metals & materials
426	Double coated red polypropylene with a high tack rubber adhesive.	<ul style="list-style-type: none"> • Used to highlight splices where easy visibility is desired
430	Transparent polyester film with ultra high tack rubber adhesive. Quick stick adheres well to wide range of substrates.	<ul style="list-style-type: none"> • Excellent for mounting nameplates and signs • Splicing paper, foil, cork, felt, plastic or fabric • Core startup
431	Transparent polyester with acrylic adhesive offering high adhesion and excellent UV and weather resistance.	<ul style="list-style-type: none"> • Used in textile industry • Good bond to broad range of foam • Photo mounting
440	Highly conformable cotton/polyester blend with blue poly liner offering clean removal with no residue.	<ul style="list-style-type: none"> • Install carpets & pads at convention centers, arenas & hotels • Hold signs and dispensers on POP merchandising • Attach printing plates to print cylinders • Cushion metal & glass against vibration • Bonding irregular surfaces such as wood to cloth
441	Heavy-duty D/C cloth coated with a high tack white permanent adhesive with an easy-to-remove gold paper liner.	<ul style="list-style-type: none"> • Carpet Installation • Splice rolls of wallpaper, textiles and polyethylene
444	Transparent UPVC film with an acrylic adhesive, good resistance to aging and light.	<ul style="list-style-type: none"> • Retail gift wrap • Core start & end tabbing paper, foil, film & ribbon • Splice plastic, metal foil, paper & cardstock • Book inserts • Attach outserts to bottles
448	Transparent polyester film with a permanent adhesive on one side and removable on the other, allowing product to be opened and resealed.	<ul style="list-style-type: none"> • Poly bag closure • Temporary poster board mounting • Post pricing to supermarket shelves
458	Thin general grade unsupported adhesive transfer with excellent holding power on less critical applications.	<ul style="list-style-type: none"> • General purpose splicing
459XL	Unsupported adhesive transfer with extended liner in 3000 ft. or 6000 ft. rolls for automatic machine application.	<ul style="list-style-type: none"> • Printing industry • Contract & fulfillment packaging • Splicing

DOUBLE COATED TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
460	D/C Adhesive Transfer - 2 mil	60	A	2	32			10° - 250°	A	3M 465 Shurtape TA450 Tesa 4900 Nitto 595B
461	D/C Adhesive Transfer - 5 mil	60	A	5	72			10° - 250°	A	3M 950
466	D/C Adhesive Transfer - 1.6 mil Use with ATG	36	A	1.6	25			-40° - 250°	D	3M 924 Shurtape TG356
467	D/C Adhesive Transfer - 5 mil Use with ATG	18 36	A	5	144			-32° - 258°	D	3M 926 Tesa PV9
470	D/C UPVC - White	36	A	8.5	84	11.4	180	-22° - 213°	A	Tesa 4970
475	D/C Polyester Red Translucent Liner	60	A	8	70	28	120	-22° - 356°	A	Tesa 4965

DOUBLE COATED FOAM TAPE

416	D/C Foam - 1/16"	36	R	1/16	125		0.4	0° - 150°	I	Stik II 1016 3M 4466 Fasson 2116
NEW 416A	D/C Foam - 1/16" Acrylic Adhesive	36	A	1/16	105			-4° - 176°	I	3M 4496
418	D/C Foam - 1/8"	18	R	1/8	120		0.4	0° - 150°	I	Stik II 1008 Fasson 2108
432	D/C Foam - 1/32"	72	R	1/32	120		0.4	0° - 150°	I	Stik II 1232 3M 4462 Fasson 2132
NEW 432A	D/C Foam - 1/32" Acrylic Adhesive	72	A	1/32	100			-4° - 176°	I	3M 4492
1416 1432	D/C "Fastac" Foam Pieces	Indiv. Pieces	R	1/16 1/32	120 125		0.4	0° - 150°	U	3M 4026
4025 4030 4045 4060	D/C Ultra High Bond	72 72 36 36	A	25 30 45 60	15	200	500	-30° - 200°	I	3M 4925 3M 4930 3M 4943 3M 4960

CLOTH DUCT TAPE

928	Duct Tape - Economy Grade Silver	60	R	8	35	20	8	32° - 200°	F	IPG AC15 Shurtape PC595 Tyco 393
930C	Duct Tape - General Purpose Colors	60	R	9	40	23	16	32° - 200°	F	Shurtape PC600 IPG AC20 Tyco 203
933	Duct Tape - Premium Grade	60	R	12	80	50	5	32° - 200°	F	Tyco 231 Shurtape PC622 IPG AC50

NO.	DETAILED DESCRIPTION	APPLICATION
460	A conformable, unsupported acrylic adhesive offering excellent adhesion to irregular surfaces. Resists humidity, most solvents and UV light. Will withstand elevated temp and will not slip or break when passed over high temp roller.	<ul style="list-style-type: none"> • Excellent for flying splice on paper, film & foil • Framing industry • Direct mailing
461	High performance unsupported acrylic adhesive transfer - bonds to many dissimilar surfaces. Good shear holding power and high initial adhesion.	<ul style="list-style-type: none"> • Printing Industry - laminating or holding difficult or glossy paper, mount posters & displays • Bond fabric and trim to window blinds • Gap filling • Splice film, foil, plastic, & wood • Foam lamination
466	Similar to Decker's #460, but reverse-wound for use with ATG Dispenser.	<ul style="list-style-type: none"> • Web mounting • Sealing envelopes • Artists mounting applications • Picture framing • Photo mounting • Product assembly
467	Similar to Decker's #461, but reverse-wound for use with ATG Dispenser.	<ul style="list-style-type: none"> • Sample swatch assembly • Mounting or closing of printed glossy surfaces • Photo mount • Bonding folders or boxes that have a high degree of memory
470	Heavy-duty UPVC film coated with a high bond acrylic adhesive for good resistance to UV, aging, chemicals and solvents.	<ul style="list-style-type: none"> • Weather strip attachment • Seam holding before sewing • Splicing coated card board • Mounting plastic & wooden trim, trophy nameplates, wood and metal signs • Perfect for die cuts
475	A premium high-performance tape with a solvent acrylic adhesive. This tape offers high adhesion and shear values with excellent temperature and UV resistance.	<ul style="list-style-type: none"> • Window shade and blind applications • Trophy tape • Wallpaper splicing • Mounting plastic parts in auto industry
416	A 1/16" closed cell, cross linked white polyethylene foam with an extremely aggressive rubber adhesive for mounting applications. High initial tack and quick stick. Recommended for most applications.	<ul style="list-style-type: none"> • Join & mount a wide range of objects & irregular surfaces • Seals well against moisture, dust & light • Shower & tub enclosures • Window trim • Cushioning sound, shock & vibration • POP Displays • Mounting mirrors • Excellent for die cutting
416A	A 1/16" white polyethylene conformable closed cell foam with a high strength acrylic adhesive with blue poly liner. Complies with performance requirements of AAMA-810.1-92.	<ul style="list-style-type: none"> • Designed for more demanding indoor/outdoor mounting applications (signs, nameplates, POP display, wire & cable clips, dispensers, plastic extrusions) • Window glazing
418	A 1/8" closed cell, cross linked white polyethylene foam with an extremely aggressive rubber adhesive for mounting applications. High initial tack and quick stick.	<ul style="list-style-type: none"> • Used when a thick cushioning is required
432	A 1/32" closed cell, cross linked white polyethylene foam with an extremely aggressive rubber adhesive for mounting applications. High initial tack and quick stick.	<ul style="list-style-type: none"> • Joining & mounting wide range of objects & irregular surfaces • Seals well against moisture, dust & light • Shower & tub enclosures • Window trim • Cushioning sound, shock & vibration • POP Displays • Mounting mirrors • Excellent for die cutting
432A	A 1/32" white polyethylene conformable closed cell foam with a high strength acrylic adhesive. Blue poly liner.	<ul style="list-style-type: none"> • Designed for more demanding indoor/outdoor mounting applications (signs, nameplates, POP display, wire & cable clips, dispensers, plastic extrusions)
1416 1432	See 416 & 432 D/C foam for description, & application. Available in 1/16" thick or 1/32" thick. Sizes are 3/4" x 3/4", 1" x 1" or 1" x 2". Packaged in bags of 1000.	<ul style="list-style-type: none"> • Same application as 416 & 432 but individual pieces in a convenient die-cut form on an extended liner
4025 4030 4045 4060	High strength acrylic tape that is UV, solvent and moisture resistant. Available in 25, 30, 45 and 60 mil thick.	<ul style="list-style-type: none"> • Sound deadening and dampening of shock and vibrations • Replace mechanical fasteners and welds • Used in aviation, electronics, computer, construction and marine industries • Mounting signs and low surface energy plastic & metals
928	Polycoated waterproof duct tape with a natural rubber adhesive.	<ul style="list-style-type: none"> • HVAC • Carpet pad seaming (for conventions) • All-purpose patch tape for metal and plastic • Hang and splice heavy polyethylene drapes
930C	Colored duct tape with a natural rubber adhesive. Available in 9 colors: silver, black, blue, brown, green, olive drab, red, white, yellow.	<ul style="list-style-type: none"> • General purpose bundling & package repair • Duct sealing • Moisture-proofing • Carpet patch repair • Color coding
933	Top of the line polycoated duct tape. Excellent strength, adhesion, abrasion resistance and superior performance. Meets ASTM D-5486 (formerly PPPT-60D). Available in olive drab and black.	<ul style="list-style-type: none"> • Government approved waterproof packaging tape • HVAC • Repair of canvas and tarpaulin • Hold insulation material • Carpet splicing

CLOTH DUCT TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
937	Duct Tape - High Performance White	60	R	12	75	33	5	32° - 200°	F	Shurtape PC622 Tyco 221
940	Uncoated Cotton Cloth - White	60	R	10.5	28	36	5	32° - 160°	F	Tyco 152 Ideal 220
970	Vinyl Coated Cloth (Gaffers Tape)	60	R	11	28	48	4	32° - 160°	F	Shurtape PC628 Tyco 510
4565	Printers Roller Wrap	36	R	10.8	30	120	5	40° - 265°	T	Tesa 4863

ELECTRICAL TAPE

6050 6050C	Vinyl Electrical - Black & Colors	60 FT	R	7	18	18	230	0° - 176°	R	Permacel P22 Shurtape EV57
6051	All-Weather Vinyl - Black	66 FT	R	7.5	16	18	200	-10° - 176°	M	Permacel P226
6060	Vinyl Pipe Wrap -10 Mil Black	100 FT	R	10	20	25	200	0° - 176°	A	3M 472 Permacel P306
6080	Friction Tape	60 FT	R	15	14	42	8	0° - 176°	R	Scapa 167 Tyco 163
6440	Laminated Polyester/Paper	60	TR	6	60	45	2	0° - 266°	A	Permacel P248 IPG 4426
6624	Glass Cloth - Rubber Adhesive	60	TR	7.6	40	120	5	40° - 250°	A	3M 27 Permacel P21
6625	Glass Cloth - Silicone Adhesive	36	S	7.2	40	120	5	-75° - 500°	A	Permacel P212
6800	Polyester Film - Yellow	72	TR	2.5	40	23	100	0° - 266°	A	3M 56 Permacel P256 Ideal 700

FOIL TAPE

960	Aluminum Foil - Lined	50	A	3.25	45	15	5	30° - 150°	F	3M 427 Permacel P11L Shurtape AF973
961	Aluminum Foil - Linerless	60	A	5	55	28	5.5	-30° - 250°	A	3M 425 Permacel P11 Shurtape AF-75
964CA	Aluminum Foil Conductive Adhesive Lined	60	CA	4	36	16	5	0° - 250°	T	3M 1170 Permacel P111

NO.	DETAILED DESCRIPTION	APPLICATION
937	High performance polycoated duct tape with solvent resistant natural rubber adhesive.	<ul style="list-style-type: none"> • Blocking of frames in the silk screen print industry • Waterproof packaging • Repair canvas & tarpaulin • Can and barrel sealing • Sealing pre-formed duct joints
940	A highly conformable white cotton cloth tape. Stain and erosion resistant. Printable.	<ul style="list-style-type: none"> • Finger wrap in manufacturing, pharmaceutical, glass or brick industry • Athletic equipment • Tool handle wrap • Protection of tree saplings on tree farms • Surface protection of rough or odd shaped metals • Coil winding • Wire harness wrap
970	Premium quality vinyl coated waterproof cloth tape that is very durable and abrasion resistant. Offers a clean removal and is used where high adhesion and tensile strength are required. Available in 9 colors: silver, black, blue, brown, green, olive drab, red, white, yellow. Printable.	<ul style="list-style-type: none"> • Gaffers tape on floors and stages, and to hold wiring, lighting and props • Low light reflection • Book binding • Seat repair • Cable wrapping • Harness tape • Seal drums and pails • Mask silk screen frames
4565	A woven fiberglass cloth that has a tightly cured silicone surface with a natural grip.	<ul style="list-style-type: none"> • Printing/converting industry to keep rollers clean of ink and adhesive buildup, and to keep film and paper from tracking while being converted
6050 6050C	A 7 mil UL listed vinyl tape that is resistant to sun, water, oil and corrosive chemicals. Available in black and 7 colors (red, white, blue, yellow, green, grey and orange).	<ul style="list-style-type: none"> • Color coding • General purpose electrical tape • Splice, insulate and bind wire harnesses
6051	A 7.5 mil all-weather flame-retardant electrical vinyl. Performs well in cold weather. This tape is corrosion resistant, and has excellent memory and elongation.	<ul style="list-style-type: none"> • Utility repair • Wrapping wires • Outdoor applications • Bundling of metal or wires in construction
6060	10 mil vinyl pipe wrap with a rubber adhesive offering environmental, mechanical and electrical protection against corrosion above and below the ground. Bacteria and fungus resistant.	<ul style="list-style-type: none"> • Installing gas and pipe lines in underground utilities • Installation of chutes for drive-thru banks • Moisture barrier on aircraft and floor panels
6080	A quality cotton cloth tape that has outstanding abrasion and water resistance, providing long-lasting waterproof splices.	<ul style="list-style-type: none"> • Hockey stick tape • Spot holding on wire harnesses • Applied to joints of electrical wires and cables
6440	Rope fiber electrical insulating tape with a thermosetting rubber adhesive. Tear resistant and can withstand transformer oil, as well as hold after prolonged baking.	<ul style="list-style-type: none"> • Bundling leads • Anchoring terminal boards • Used for coil winding in electrical motors
6624	Glass cloth with a thermosetting rubber adhesive that is abrasion and solvent resistant. Excellent tensile strength and heat resistance.	<ul style="list-style-type: none"> • Insulating furnace power supply leads • Used for coil winding in electrical motors • Protection of wires & cables in electrical appliances & automobiles
6625	High performance glass cloth tape with a durable woven fiberglass backing. Exceptionally strong, abrasion and fire resistant.	<ul style="list-style-type: none"> • Manufacture of electronic parts or assemblies • Insulating coil connections • Used whenever heat resistance is required • Used for coil winding in electrical motors
6800	Polyester film with a yellow thermosetting rubber adhesive. Used where high dielectric strength, moisture resistance and conformability are desired.	<ul style="list-style-type: none"> • Insulate connections & anchor lead wire • High speed machine applications • Non-corrosive tape for fine-wire applications • Coil protective wrap
960	Dead-soft aluminum foil tape with a solvent resistant acrylic adhesive. This lined tape can be die-cut to specific size or shape.	<ul style="list-style-type: none"> • HVAC industry to seal duct joints • Temporary metal repair (truck bodies, mufflers, metal containers) • Waterproof sealing of drums & canisters • Moisture barrier and secure wires in appliances • Seal edge of double-pane thermo windows
961	Dead-soft aluminum tape that can be applied at low temperatures and has good high and low temperature resistance. No liner - this tape is designed to stick firmly to it's own backing. Meets Gov't. specs. LT-80B, Mil-T-23397B Amdt. 2 Type II	<ul style="list-style-type: none"> • Form trough for directing runoff of paint & chemicals • Masking electroplating applications • Used to reflect heat in white goods appliances • Window mask & protective covering on aircraft stripping work • Moisture / vapor protection of waterproof seals • Sound vibration dampening
964CA	A dead soft lined aluminum foil coated with a conductive acrylic adhesive. Meets UL510 flame spread requirement.	<ul style="list-style-type: none"> • Electronics industry: EMI/RFI shielding • Cable wrapping • Wiring board layout, design & repair

FOIL TAPE

NO.	DECKER PRODUCT	LENGTH / YARD	ADHESIVE SYSTEM *	THICKNESS (mils)	ADHESION (oz./in)	TENSILE (lbs./in)	ELONGATION (%)	TEMPERATURE (FAHRENHEIT)	PACKAGE CHART (SEE PG. 2)	COMPARATIVE
967	Lead Foil - Lined	36	A	6.5	26	23	30	-30° - 275°	T	3M 420
968	Copper Foil - Lined	36	A	3.5	40	25	5	To 311°	T	3M 1194 Permacel P389
969CA	Copper Foil Conductive Adhesive Lined	36	CA	3.5	40	25	5	To 311°	T	3M 1181 Permacel P391

TEFLON TAPE, UHMW & KAPTON FILM

520-3 520-5 520-6 520-10	Teflon Coated Glass Cloth	36	S	5 7 8 12	30 40 40 40	60 110 100 200	5	-100° - 500°	T	St. Gobain SG03 3M 5451/53 Permacel P440
525-2 525-3 525-5 525-10	Skived Teflon	36	S	4 5 7 12	20 28 26 26	10 18 22 55	300	-100° - 500°	T	St. Gobain 2045 Dewal 204 3M 5480/81 Permacel P421/4
527-2 527-5	Hi-Modulus Teflon	36	S	4 7	20	35 35	100	-100° - 500°	T	St. Gobain 2255 Dewal 204HD 3M 5490/91 Permacel P422
528-5 528-10	UHMW	36	A	7 12	30 50	35 60	300	-40° - 225°	T	St. Gobain 2302 Dewal 423 3M 5421/23 Permacel PGLIDE
530-1 530-2	Kapton Film	36	S	2.5 3.5	26 23	30 52	60 76	-100° - 500°	T	St. Gobain 2345 Dewal 304 3M 5413 Permacel P221/2

BOX SEALING - MANUAL & AUTOMATIC

149R	1.7 mil BOPP - Hot Melt	All box sealing tape available in 55, 110 & 1000 yds.	R	1.7	44	22	165	45° - 120°	U	3M 369, IPG 6100
149X	1.7 mil BOPP - Acrylic		A	1.7	17	18	160	-40° - 150°	U	3M 305, IPG 261
149NR	1.7 mil BOPP - Natural Rubber		NR	1.7	23	24	102	0° - 150°	U	IPG 570
150R	1.9 mil BOPP - Hot Melt		R	1.9	48	26	165	45° - 120°	U	3M 371, IPG 7100
150X	2 mil BOPP - Acrylic		A	2	20	20	160	-40° - 150°	U	3M 311, IPG 271
150NR	2 mil BOPP - Natural Rubber		NR	2	23	31	102	0° - 150°	U	IPG 500
150C	2 mil BOPP - Colors		A	2	20	20	160	-40° - 150°	U	3M 311, IPG 7150
155R	2.5 mil BOPP - Hot Melt		R	2.5	46	38	100	35° - 140°	U	3M 373, IPG 9100
155X	2.6 mil BOPP - Acrylic		A	2.6	25	34	160	-40° - 150°	U	IPG 291
155NR	2.3 mil BOPP - Natural Rubber		NR	2.3	26	31	130	0° - 150°	U	IPG 510
157R	3 mil BOPP - Hot Melt		R	3	80	50	160	-10° - 200°	U	3M 375, IPG 1100
157X	3 mil BOPP - Acrylic		A	3	25	38	160	-40° - 140°	U	IPG 211
158R	2.9 mil Polyester - Hot Melt		R	2.9	65	50	110	35° - 140°	U	3M 355, IPG 5200
158NR	2.9 mil Polyester - Natural Rubber		NR	2.9	40	50	110	0° - 150°	U	3M 355, IPG 580
160	2.2 mil PVC - Natural Rubber		NR	2.2	18	22	70	-4° - 158°	U	IPG 530
160C	2.3 mil PVC - Colors		NR	2.3	18	22	80	-4° - 158°	U	IPG 600
161	3 mil PVC - Natural Rubber		NR	3	30	40	120	0° - 150°	U	
170LT	Multi-Pack Tape (for bundling twin packs, bags, beverage cartons)	R	2	14	51	130	40° - 120°	U	3M 811	

* ADHESIVE SYSTEM: A = ACRYLIC R = RUBBER S = SILICONE CA = CONDUCTIVE NR = NATURAL RUBBER

NO.	DETAILED DESCRIPTION	APPLICATION
967	A lead foil on a liner with an aggressive adhesive that offers long aging and good solvent resistance.	<ul style="list-style-type: none"> Decorative leaded windows Masking during electroplating Moisture and vapor barrier Radiation / x-ray shielding
968	A lined copper foil with a high tack acrylic adhesive.	<ul style="list-style-type: none"> EMI/RFI Shielding Cable repair Flat conductor assemblies Decorative leaded windows Wiring board design
969CA	A copper foil with a conductive acrylic adhesive that provides a low rate of electrical resistance. Meets gov't. spec. MIL-T-47012.	<ul style="list-style-type: none"> Electronics industry: EMI/RFI shielding Static charge draining Supplemental shield at seams, joints, doors & covers of electronic cabinetry
520-3 520-5 520-6 520-10	A PTFE coated fiberglass tape to operate in demanding temperature and chemical environments. This tape offers good tear-resistance, strength and durability.	<ul style="list-style-type: none"> Release surface on heat sealers, blister formations, and form-fill-seal equipment Anti-stick properties make it an ideal tape for lining guide rails, chutes & slides
525-2 525-3 525-5 525-10	A pure Teflon film with a high temperature silicone adhesive. This tape exhibits high conformability.	<ul style="list-style-type: none"> Electrical: insulation of coils, transformers, power cable, & wire harnesses in the aerospace industry Mechanical: lining of chutes, & conveyor systems guide rails Release on molds in chemical & plastic industry
527-2 527-5	A strong thin Teflon that is extremely durable under heavy usage. It has an easy release for automatic applications and is chemically inert. Will perform under continuous temperatures up to 500°.	<ul style="list-style-type: none"> Used whenever slick surface is needed to speed up movement of material Mask parts placed in chemical, cleaning & electroplating solutions Insulation of coils and transformers
528-5 528-10	An ultra high molecular weight polyolefin film with an acrylic adhesive. The non-stick surface makes it an ideal product for use on conveyors or in chutes.	<ul style="list-style-type: none"> Line chutes and conveyors Post press to minimize web friction Applied to guide rails to reduce noise levels in glass bottling plants
530-1 530-2	Kapton film with high performance silicone adhesive. Superior insulator performing to high temperature range of 500°.	<ul style="list-style-type: none"> Gold finger masking of printed circuit boards

COLORS

149R	Clear Only
149X	Tan, White, Clear
149NR	Clear Only
150R	Tan, Clear
150X	Tan, White, Clear
150NR	Clear Only
150C	Rd, Blu, Grn, Blk, Or, Yw, Prpl
155R	Tan, Clear
155X	Tan, White, Clear
155NR	Clear Only
157R	Tan, Clear
157X	Tan, White, Clear
158R	Clear Only
158NR	Clear Only
160	Tan, White, Clear
160C	Yw, Lt. Blu, Md. Blu, Dk. Blu, Or, Rd, Blk, Dk Grn, Lt Grn
161	Clear Only
170LT	Clear Only

DECKER TAPE CARTON SEALING TAPE comes in a variety of films, adhesives, widths, lengths and colors for each of your unique requirements. To add even more personality, try our custom printed tape!

Tape Width Guide:

- Never use more than 1 strip to seal boxes.
- Seal boxes a minimum of 2” down the side.
- Use 2” tape for boxes 15” or less, or when box flaps meet.
- Use 3” tape for boxes over 16” wide, on over filled boxes, when flaps do not meet or on difficult to adhere surfaces.

REPAIR TAPE "POCKET" PADS

DECKER TAPE PADS are 25 pieces of pre-cut heavy-duty tape on a pad that slip into your pocket to replace a roll of tape and a pair of scissors for the ultimate in convenience. Saving time saves money, and this is where Decker Tape Pads excel. This tape is heavily used by merchandisers in the beverage industry to make quick and easy repairs to torn cartons while in transit. They are also perfect for retail sealing of plastic garment bags, repairing ripped bagged products (flour, fertilizer, pet food, ice melt, etc), sealing large over-stuffed envelopes, protecting labels, laminating business cards, and endless other uses. These pads are not only convenient, they increase profits by reducing returns. Stock sizes range from 1" x 3" to 4" x 6". Also available in custom sizes and printed.

• 1570 REPAIR TAPE PADS:

SIZE	PADS/CASE (25 SHEETS/PAD)	APPLICATIONS/CASE
1" x 3"	2160	54,000
2" x 3"	1080	27,000
1- 1/2" x 4"	640	16,000
2" x 4"	480	12,000
1" x 6"	400	10,000
2" x 6"	200	5,000
4" x 6"	200	5,000



• 1322 FILAMENT TAPE PADS:

SIZE	PADS/CASE (25 SHEETS/PAD)	APPLICATIONS/CASE
1" x 3"	800	20,000
1" x 6"	400	10,000
2" x 6"	200	5,000
2" x 8"	200	5,000



• 1930 DUCT TAPE PADS:

SIZE	PADS/CASE (20 SHEETS/PAD)	APPLICATIONS/CASE
2" x 3"	300	6,000
2" x 6"	150	3,000

DOUBLE COATED TAPE PADS

All the convenience and benefits of our "Pocket Pads", PLUS the aesthetics that a hidden seal has to offer. Fifteen sheets of Double Coated Tape on a single pad, this tape goes a LONG way. It cleanly preserves the image of cartons by leaving no evidence of repair. It replaces hot glue and ATG guns (which require time to heat up, are messy, often break, and can cause burns). Major beverage industry companies have approved this for quality assurance. This tape is also used in the following industries: notion, gift wrap, forms/printing, display, assembly, and fulfillment contract work.

• 1404 DOUBLE COATED TAPE PADS:

SIZE	PADS/CASE (15 SHEETS/PAD)	APPLICATIONS/CASE
1" x 4"	450	6,750
1" x 6"	300	4,500
2" x 3"	300	4,500
2" x 6"	150	2,250




RETURN TAPE

• 150RT RETURN TAPE:

A 2 mil poly film laminated to a split-back release liner. These pre-cut strips of tape are used to reseal opened boxes or packages being returned to sender, encouraging future sales. This adds to customer convenience and increases profits in re-saleable returns. Available plain, stock or custom printed in packages of 100 (stock print is clear tape with red ink). The minimums are 15 packages for plain or stock and 90 packages for custom printed. The standard sizes are 2" x 17", 2" x 23", 3" x 17", 3" x 23". White, tan or clear tape.



**Example of
Decker 150RT/SP
Stock Print**

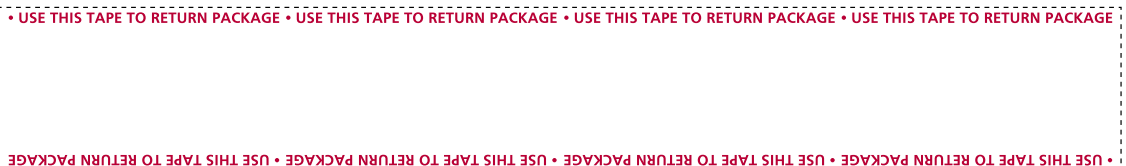

DECKER TAPE HANDLES are supplied in a convenient dispenser package and are available in plain white or custom printed. They offer countless savings and conveniences:

- Huge cost savings over large bags.
- Requires minimum overall storage space at both the register and in the stock room.
- Source reduction for post-consumer waste.
- Security measure in identifying purchased items at a glance, and eliminating possible theft that large bags encourage.
- Promotes store recognition with highly visible custom print.
- Gives shoppers one-hand control and convenience, allowing them to purchase more items.
- Available in 15, 30 and 50 lbs. carry weight.

DIAGRAM OF TAPE HANDLE- OVERALL LENGTH: 17" OR 23", WIDTH: 1" OR 1-3/8"

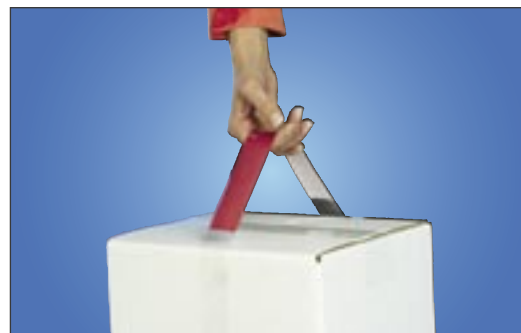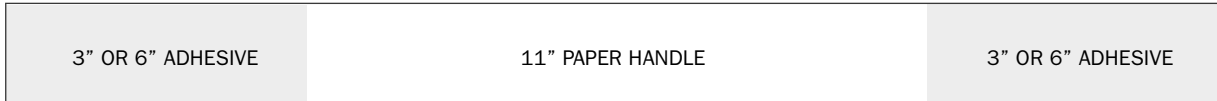

• WHITE TAPE HANDLES:

(25 HANDLES/PAD)	SIZE	CARRY WEIGHT	PADS/CASE	HANDLES/CASE
1575A Plain White	1" x 17" x 3"	10 Lb.	120	3000
1575B Plain White	1-3/8" x 17" x 3"	15 Lb.	80	2000
1575C Plain White	1-3/8" x 23" x 6"	15 Lb.	80	2000
1595C Plain White	1-3/8" x 23" x 6"	30 Lb.	80	2000
1325C Filament	1-3/8" x 23" x 6"	50 Lb.	40	1000

Also available in retail box packaging. Ask your Decker Tape representative for details.


• CUSTOM PRINTED TAPE HANDLES:

(25 HANDLES/PAD)	SIZE	CARRY WEIGHT	PADS/CASE	HANDLES/CASE
1575ACP Custom Printed	1" x 17" x 3"	10 Lb.	120	3000
1575BCP Custom Printed	1-3/8" x 17" x 3"	15 Lb.	80	2000
1575CCP Custom Printed	1-3/8" x 23" x 6"	15 Lb.	80	2000
1595CCP Custom Printed	1-3/8" x 23" x 6"	30 Lb.	80	2000

Also available in retail box packaging. Ask your Decker Tape representative for details.

- Custom Print: Minimum 6 cases, up to (2) color print, random repeat print only.

Example of Random Repeat

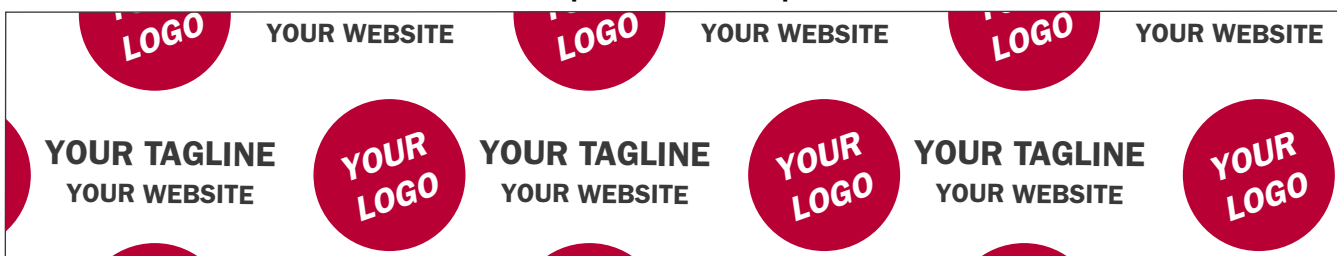


HOOK & LOOP

2500H 2505L	"Fasloc" Hook "Fasloc" Loop	Hook and Loop available in black or white on 25 ft rolls. Hook and Loop sold individually, 2 Roll Minimum. Uses include window and display case dressing, assembling multi-packs and POP displays.
2510H 2515L	"Fasloc" Hook & Loop Die Cut Circles	Die Cut Circles of Hook (2510) or Loop (2515). Available on rolls in black or white. Standard diameters of 3/8", 1/2", 5/8" and 3/4"

POUCH TAPE

NO.	DECKER PRODUCT	POUCHES/ROLL	ROLLS/CASE
190	Transparent Pouch Tape printed "Packing List Enclosed" (Orange Ink)	500	10
192	Transparent Pouch Tape printed "Documents Enclosed" (Black Ink)	500	10
193 - P	Transparent Pouch Tape printed "Packing List Enclosed" (Orange Ink)	333	12
193 - D	Transparent Pouch Tape printed "Documents Enclosed" (Black Ink)	333	12
NEW 193 - C	Transparent Pouch Tape printed "Documents Enclosed" & "Packing List Enclosed" (2 Colors: Red & Black)	333	12

190 & 192: Available in 4 standard sizes. Outside tape dimensions: 4 x 6, 5 x 7, 6 x 8, 6 x 10. 190 is comparable to 3M 827 & 192 is comparable to 3M 8240. Custom Pouch sizes and imprinting available. 193-P, 193-D, 193-C are available in a 5 x 7 outside tape width only.

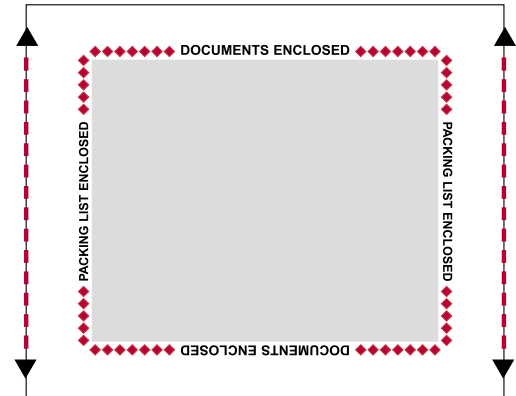

NEW: 193-C diagram shown above. Grey area represents non-adhesive area.

REINFORCED GUMMED TAPE

• CUSTOM PRINTED:


GT35CP	Custom Printed Gummed Tape Kraft or White	Available 72mm x 450 Ft (10 rolls/case). Print in 1 or 2 colors. 5 Case Minimum - For Standard Ink Colors: see page 24. All gummed tape orders are FOB Mill.
---------------	--	--

• STOCK PRINTED:

Reinforced gummed tape printed with stock message as shown. 72mm x 450 Ft. Kraft colored tape with Red Ink. Packed 10 Rolls/Case.
All gummed tape orders are FOB Mill.



GSP-1



GSP-2



GSP-3



GSP-4

TAPE DISPENSERS

<p>1015</p> <p>A LIGHTWEIGHT DISPENSER WITH CONSTANT BRAKE FOR MANUAL APPLICATION OF 2" PVC AND POLY-PROPYLENE TAPES.</p> 	<p>1035</p> <p>A WEIGHTED BASE DESK TOP DISPENSER, FITS BOTH 1" AND 3" I.D. CORE TAPES.</p> 	<p>1050</p> <p>LABEL PROTECTION DISPENSER AVAILABLE IN BOTH 4" AND 6" SIZES.</p> 
<p>1018</p> <p>A LIGHTWEIGHT DISPENSER WITH CONSTANT BRAKE FOR MANUAL APPLICATION OF 3" PVC AND POLY-PROPYLENE TAPES.</p> 	<p>1045</p> <p>PRODUCE BAG SEALING DISPENSER FOR 3/8" PRODUCE TAPE.</p> 	<p>1066</p> <p>A HAND DISPENSER FOR 466 & 467 ADHESIVE TRANSFER TAPE: 1/2" AND 3/4".</p> 
<p>1030</p> <p>ALL METAL HAND FILAMENT DISPENSER FOR TAPE UP TO 1" WIDE.</p> 	<p>1090</p> <p>POUCH TAPE DISPENSER DESIGNED TO DISPENSE ONE POUCH AT A TIME. IT HAS A WEIGHTED BASE AND CAN BE ADJUSTED FOR VARIOUS POUCH SIZES.</p> 	

• SECURITY TAPE:



NO.	DECKER PRODUCT	DESCRIPTION
100ST	Security Cut Polypropylene - Plain	This film has a serrated edge creating an easy-tear tamper resistant seal. It is used to seal small cartons or bags containing expensive items (computer software, pharmaceuticals, jewelry, legal and medical documents). Available plain, stock print "Tamper Resistant", or custom printed and in an assortment of colors.
100ST/SP	Security Cut Polypropylene - Stock Print	
100ST/CP	Security Cut Polypropylene - Custom Print	

• STATIC FREE TAPE:




NO.	DECKER PRODUCT	DESCRIPTION
106SP 107SP	Stock Printed Static Free Tape	Used in packaging of static sensitive products. Available plain, with a stock print (shown above) or custom printed. Request on a plastic (106) or paper (107) core.
106CP 107CP	Custom Printed Static Free Tape	

• ESD AISLE MARKING:



NO.	DECKER PRODUCT	DESCRIPTION
144SP	Stock Printed Heavy Duty Aisle Marking	Yellow or white vinyl film with overlamine, creating a highly visible, durable, abrasion resistant aisle marking tape. Available with stock imprint as shown, or custom printed. Standard size is 2" or 3" x 36 Yards.
144CP	Custom Printed Heavy Duty Aisle Marking	

• TAMPER EVIDENT TAPE:

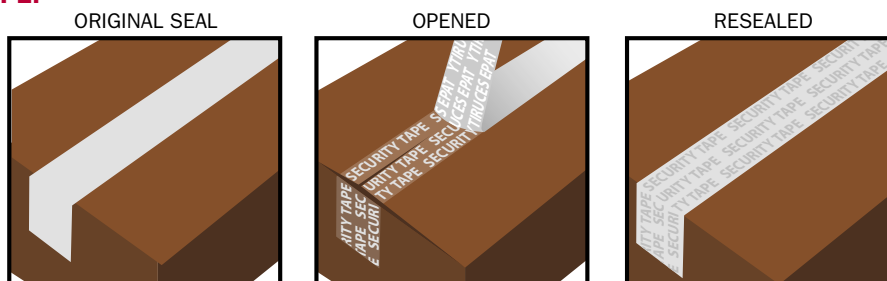

NO.	DECKER PRODUCT	DESCRIPTION
710W	Tamper Evident White Tape Rolls	Tamper evident tape designed to reduce product theft. An excellent choice for closing cartons containing high-value items such as electronic and computer products, pharmaceutical items, confidential documents and jewelry. Once removed or tampered with, the message "SECURITY" remains clearly visible. Available in 2" and 3" rolls, individual sheets, or pads. This tape can be hand or machine applied and is offered in standard white (710W) or red (710R).
720W	Tamper Evident White Tape Sheets	
730W	Tamper Evident White Tape Pads	

STOCK PRINTED TAPE

• 1.9 MIL POLYPROPYLENE HOT MELT:

SIZE:	2" x 55 YD	2" x 110 YD	3" x 110 YD	2" x 1000 YD	3" x 1000 YD
ROLLS/CASE:	36	36	24	6	4



150SP - 1 WHITE W/RED



150SP - 11 CLEAR W/BLACK



150SP - 23 WHITE W/RED




150SP - 2 WHITE W/RED & BLUE



150SP - 12 WHITE W/RED



150SP - 28 WHITE W/RED



150SP - 3 WHITE W/RED & BLUE



150SP - 13 WHITE W/RED
150SP - 18 TAN W/RED



150SP - 29 WHITE W/RED




150SP - 4 WHITE W/RED



150SP - 14 WHITE W/RED & BLUE



150SP - 26 WHITE W/RED



150SP - 5 WHITE W/RED
150SP - 9 CLEAR W/RED




150SP - 15 WHITE W/RED



150SP - 24 WHITE W/RED




150SP - 6 WHITE W/RED



150SP - 16 WHITE W/RED



150SP - 25 WHITE W/RED



150SP - 7 TAN W/RED
150SP - 8 TAN W/BLACK



150SP - 17 WHITE W/BLACK
150SP - 19 TAN W/RED



150SP - 27 WHITE W/RED & GREEN



150SP - 10 WHITE W/RED



150SP - 20 CLEAR W/RED & BLACK
150SP - 21 TAN W/RED & BLACK
150SP - 22 WHITE W/RED & BLACK



150SP - 30 WHITE W/RED
150SP - 31 CLEAR W/RED

NEW

• CUSTOM PRINTED BOX SEALING TAPE:

PRODUCT NO.	DESCRIPTION	COLORS
149RCP	1.7 mil BOPP - Hot Melt	Clear Only
150RCP	1.9 mil BOPP - Hot Melt	Tan, White, Clear
150XCP	2 mil BOPP - Acrylic	Tan, White, Clear
150CP	2 mil BOPP - Acrylic	Red, Blue, Yellow, Green, Orange, Purple
155RCP	2.5 mil BOPP - Hot Melt	Tan, White, Clear
155XCP	2.6 mil BOPP - Acrylic	Tan, White, Clear
157RCP	3 mil BOPP - Hot Melt	Clear Only
157XCP	3 mil BOPP - Acrylic	Tan, White, Clear
160CP	2.2 mil PVC	Tan, White, Clear, Yellow, Lt Green, Dk Green, Orange, Red, Lt Blue, Med Blue, Dk Blue



• CUSTOM PRINTED SPECIALTY TAPE:

PRODUCT NO.	DESCRIPTION	COLORS
43CP	9 mil Polyethylene Tape	White, Yellow, Clear, Red, Blue
98CP	UPVC Film Tape	Yellow, Lt Blue, Med Blue, Dk Blue, Lt Green, Dk Green, Orange, Red, Tan, White, Clear
100CP	Polypropylene Stationary Tape	White, Red, Blue, Green, Tan, Yellow, Orange, Purple
105CP	Cellophane Tape	Transparent
112CP	Polypropylene Stationary Tape	Transparent
125CP	UPVC Bag Sealing Tape	Tan, White, Clear, Yellow, Lt Blue, Med Blue, Dk Blue, Lt Green, Dk Green, Orange, Red
144CP	Heavy Duty Aisle Marking w/Overlaminat	White, Yellow
251CP	Rope Flatback Tape	Blue, Green, Orange, Red, White, Yellow
301CP	Mono Filament - Utility Grade	White
312CP	Tensilized Strapping Tape 95#	Orange, White, Clear
313CP	Polyester Filament - Superior Grade Filament	Natural


If you don't see exactly what you're looking for, call Decker Tape. Below are a few examples of our printed Filament Tapes.



ADD SOME PERSONALITY TO YOUR PACKAGING

Printed tape creates a distinctive image, adds pizzazz to your packaging, cuts inventory costs and reduces loss from pilfering. Whether it's your company logo, promotional message or handling instructions, Decker Tape will wrap your packages with the prominence they deserve.

PRINT DIRECTION:

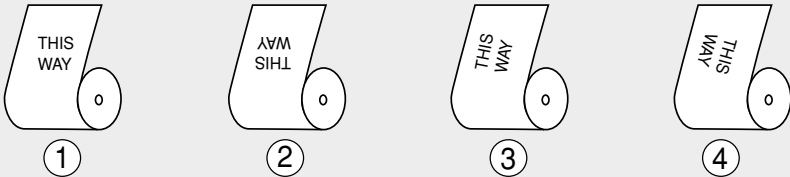

1, 2, and 3 color printing available. Decker Tape reserves the right to ship within 10% over or under ordered quantity.

STANDARD INK COLORS:

- Black
- Pantone Yellow
- Red - PMS 199
- Pantone Warm Red
- Rubine Red
- Maroon - PMS 202
- Orange - PMS 1655
- Green - PMS 347
- Reflex Blue
- Process Blue
- Blue - PMS 300
- Blue - PMS 289

(Other colors available upon request)

COLOR CHART

NO.	COLORS
42A	YELLOW, BLUE, CLEAR, GREEN, RED, WHITE, BLACK
43	CLEAR, WHITE, YELLOW, BLUE, BLACK, RED
44	BLUE, BROWN, BLACK, GREEN, GRAY, ORANGE, PURPLE, RED, CLEAR, WHITE, YELLOW
75	BLUE, PINK, YELLOW
87	YELLOW/BLACK, BLACK/WHITE, RED/WHITE
88	YELLOW/BLACK, BLACK/WHITE, RED/WHITE
90RF	YELLOW, ORANGE, RED, BLUE, GREEN, BLACK, WHITE
98C	YELLOW, LIGHT BLUE, MEDIUM BLUE, DARK BLUE, LIGHT GREEN, DARK GREEN, ORANGE, RED, BLACK, TAN, WHITE, CLEAR
100	RED, BLUE, GREEN, BLACK, TAN, WHITE, YELLOW, ORANGE, PURPLE, CLEAR
125	YELLOW, LIGHT BLUE, MEDIUM BLUE, DARK BLUE, LIGHT GREEN, DARK GREEN, ORANGE, RED, BLACK, TAN, WHITE, CLEAR
144	YELLOW, WHITE
150C	RED, BLUE, GREEN, BLACK, YELLOW, ORANGE, PURPLE, WHITE, CLEAR
160C	YELLOW, LIGHT BLUE, MEDIUM BLUE, DARK BLUE, LIGHT GREEN, DARK GREEN, ORANGE, RED, BLACK, TAN, WHITE, CLEAR
224	GREEN, BLUE, BLACK, RED, WHITE, YELLOW
250	WHITE, YELLOW, RED, GREEN, BLACK
251P	BLUE, GREEN, ORANGE, RED, WHITE, YELLOW
310	BLACK, CLEAR
312	BLACK, ORANGE, WHITE, CLEAR
317	CLEAR, ORANGE
930C	SILVER, BLACK, BLUE, BROWN, GREEN, OLIVE DRAB, RED, WHITE, YELLOW
933	OLIVE DRAB, BLACK
970	SILVER, BLACK, BLUE, BROWN, GREEN, OLIVE DRAB, RED, WHITE, YELLOW
6050C	RED, WHITE, BLUE, YELLOW, GREEN, GREY, ORANGE



FRAGRANCE *Paper Industry*
Appliances ARTS & CRAFTS
COOKWARE **LINENS**
Supermarket Literature
Computer Accessories
Machinery **Toys** Medical Devices
Security Uniform Supply **Crystal**
SKIN CARE **HOSPITAL EQUIPMENT**
FILM Athletics CHEMICAL SUPPLY
Crafts **BEVERAGE** Glass Retail Industry
ENTERTAINMENT Outdoor Power Equipment
Frozen Foods *Nutritional Products*
SOLVENTS SEALANTS **Auto Parts** Apparel
TOOLS OFFICE SUPPLY **Biochemicals**
Cosmetics BOOKS *Furniture*
Sports **AGRICULTURAL**
PHARMACEUTICAL SHOES Golf
CAMERA **Dental** Equipment
SUPPLY *Lighting*
AIRLINE INDUSTRY Healthcare
Electronics *Housewares*
Food Service Giftware



Application	Product No.	Page	Application	Product No.	Page
Adhesive Transfer Tape (ATG)	458, 459, 460 Series	11, 13	Repair Tape Pads	1570, 1322, 1404	19
Aisle Marking	44, 87, 88	3	Repositionable Tape	108	3
Aluminum Foil	960, 961, 964CA	15	Repulpable Double-Coated	402R, 403R	11
Anti-Static Tape	106, 107	3, 22	Resealable Tape - Double-Coated	448	11
Appliance Tape	315	9	Return Tape	150RT	19
Artist Tape	251P	7	Security Cut Edge	100ST	22
Bag Sealing	125	5	Security Tape - Printed	100ST/SP, CP	22
Blue Painters Masking	227	7	Silk Screen Tape	140SL	5
Bookbinding Tape	251P, 970	7, 15	Spoiled Tape	3315 - 3360	9
Carpet Tape - Double Coated	440, 441	11	Stationery Tape	105, 115, 110	3, 5
Carry Handles	1575, 1595, 1325	20	Stock Printed Tape	150SP Series	23
Carton Sealing	149, 150, 160 Series	17	Strapping Tape	310, 312, 315, 317	9
Cellophane Tape	105	3	Striped Safety Tape	87/88	3
Colored Masking	224	7	Super Clear to the Core	120	5
Computer Form Splicing Tape	111	3	Tamper Evident Tape	710W	22
Copper Foil	968, 969CA	17	Tape Handles	1575, 1595, 1325	20
Dispensers	1015-1090	21	Tape Pads	1570, 1322, 1404	19
Double-Coated	400 Series	11, 13	Teflon - Skived	525	17
Drafting Tape	260	7	aTeflon - Hi Modulus	520	17
Duct Tape	900 Series	13, 15	Thermoformable Tape	527	17
Edge Reinforcement	112TE	5	Transparent Discs	1980C	5
Electrical Tape	6050 - 6800	15	UHMW	141WS	5
Electroplating	40	3	Ultra High Bond Tape (UHB)	528	17
ESD Aisle Marking	144SP, 144CP	22	Vinyl Tape	4025 - 4060	13
Filament Tape	300 Series	9	Wafer Seals	44	3
Flatback Paper - Colors	250, 251P	7		141WS	5
Fluorescent Tape	99, 254	3, 7			
Foam Tape	408, 416, 432	13			
Foil Tape	960 Series	15, 17			
Friction Tape	6080	15			
Gaffers Tape	970	15			
Glass Cloth Tape	6624, 6625	15			
High Temperature Masking	221, 222, 223	7			
Hook & Loop	2500, 2505	21			
Kapton	530	17			
Kraft Flatback Paper Tape	229, 230, 240	7			
Label Protection Tape	180, 185, 187	5			
Lead Foil Tape	967	17			
Lithographers Tape	116	5			
Masking Tape	220, 220N	7			
Metalized Polyester	136	5			
Multi-Pack Tape	170LT	17			
Non-Skid Safety Tape	ST-31	5			
Pipe Wrap Tape	6060	15			
Polyester	130, 158	5, 17			
Polyethylene	42A, 43	3			
Polypropylene Carton Sealing	150 Series	17			
Pouch Tape	190, 192, 193	21			
Powder Coating	77	3			
Printed Carton Sealing	149CP thru 160CP	24			
Printed Filament	312CP - 314CP	24			
Printed Gummed Tape	GT35CP	21			
Printed Specialty	43CP thru 251CP	24			
Printers Roller Wrap	4565	15			
Produce Tape	125	5			
Protective Film	278, 279	5			
Protective Paper	275, 276	7			
PVC Carton Sealing	160 Series	17			
Reflective Tape	90RF	3			

By Product Number	Page	By Product Number	Page
40 to 44 Film	3	520 to 530 Teflon, UHMW, Kapton	17
75 to 77 Film	3	710W to 730W Tamper Evident Tape	22
87 to 88 Film	3	928 to 933 Duct Tape	13
90RF to 99 Film	3	937 to 970 Cloth Duct; 960 to 964CA Foil	15
100ST/CP Printed Security Tape	22	967 to 969CA Foil	17
100 to 107 Film	3	1222 Hi-temp Masking Discs	7
106CP to 107SP Printed Static Free	22	1322 Filament Tape Pads	19
108 to 111M Film	3	1325 Filament Tape Handles	20
112 to 144 Film	5	1404 Double Coated Tape Pads	19
144CP, 144SP Printed ESD Aisle Marking	22	1570 Repair Tape Pads	19
149 TO 170LT Box Sealing	17	1575 to 1595 Tape Handles	20
150RT Return Tape	19	1930 Duct Tape Pads	19
150SP Stock Printed Tape	23	1980C Thermoformable Tape	5
180 to 187 Label Protection	5	2500 to 2515 Hook & Loop	21
190 to 193 Pouch Tape	21	4025 to 4060 Double Coated UHB	13
220 to 276 Paper	7	4565 Printers Roller Wrap	15
278 to 279 Protective Film	5	6050 to 6800 Electrical	15
300 to 322 Filament/Strapping	9	GT35CP to GSP Printed Gummed Tape	21
400 to 459XL Double Coated	11	ST31 Non-Skid Safety Tape	5
416, 418, 432 Double Coated Foam	13		
460 to 475 Double Coated	13		